


LED Candle


Features:

1. High Efficiency energy saver, saving up to 80%
2. Long Lifetime, 25 000 hours average rated life
3. Clear, Crystal and Flame Tip outer bulb options
4. Available in E14 base. Other base types available on request
5. Available in colour temperature 2500K and 3000K
6. Great replacement for chandelier candelabras

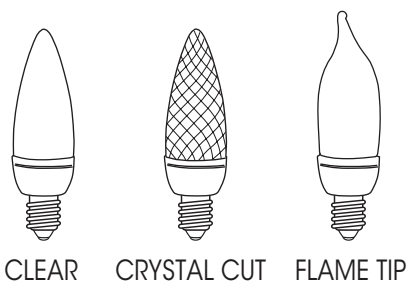

CLEAR CRYSTAL CUT FLAME TIP


Incandescent Comparison

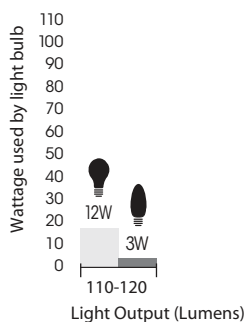

Specifications: (at full bright light)

Input Line Voltage	220-240V
Input Line Frequency	50-60Hz
Rated Lamp Life	25 000 hours
Colour Temperature	2500K and 3000K
Colour Rendering Index	>80
Min. Starting Temperature	-30°C
Max. Operating Temperature	+40°C
CE Compliance	Yes
Surge Compliance 4000V	Yes
Power Factor	>0.9

Certifications:



Order code	Description	Watts (energy used)	Base type	Lumens (light output)	Life (hours)	Colour temp (°k)	CRI	MOL (mm)	Max diameter (mm)	Weight (g)
LED CANDLE 2500K										
LDB3WE14CLR2500K	LED CANDLE 3W E14 CLEAR 2500K	3	E14	110	25 000	2500	> 80	110	34	44
LDB3WE14CRT2500K	LED CANDLE 3W E14 CRYSTAL 2500K	3	E14	110	25 000	2500	> 80	110	34	44
LDB3WE14FLT2500K	LED CANDLE 3W E14 FLAME TIP 2500K	3	E14	110	25 000	2500	> 80	120	34	44
LED CANDLE 3000K										
LDB3WE14CLR3000K	LED CANDLE 3W E14 CLEAR 3000K	3	E14	120	25 000	3000	>80	110	34	44
LDB3WE14CRT3000K	LED CANDLE 3W E14 CRYSTAL 3000K	3	E14	120	25 000	3000	>80	110	34	44
LDB3WE14FLT3000K	LED CANDLE 3W E14 FLAME TIP 3000K	3	E14	120	25 000	3000	>80	120	34	44