



Sticks

Features:

1. High Efficiency energy saver
2. Long Lifetime, 10 000 hours average rated life
3. Compact Dimensions
4. EUP Compliant
5. Available in colour temperature 2700K

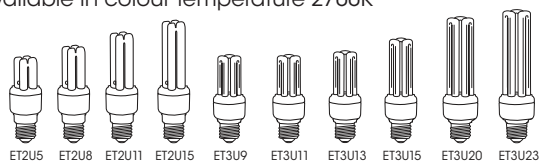

Incandescent Comparison

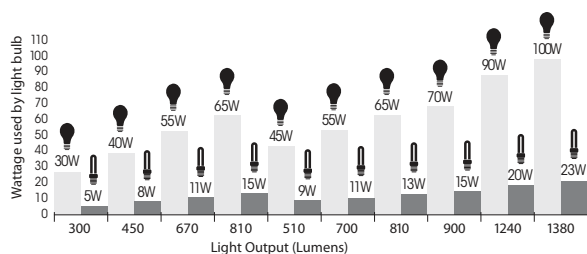

Order code	Description	Watts (energy used)	Base type	Lumens (light output)	Life (hours)	Colour temp (°K)	CRI	MOL (mm)	Max diameter (mm)	Weight (g)
------------	-------------	---------------------	-----------	-----------------------	--------------	------------------	-----	----------	-------------------	------------

2U STICKS

ET2U5E14	5W 2U STICK E14	5	E14	300	10 000	2700	82	109	36	41
ET2U5E27	5W 2U STICK E27	5	E27	300	10 000	2700	82	110	36	47
ET2U5B22	5W 2U STICK B22	5	B22	300	10 000	2700	82	109	36	49
ET2U8E14	8W 2U STICK E14	8	E14	450	10 000	2700	82	119	36	46
ET2U8E27	8W 2U STICK E27	8	E27	450	10 000	2700	82	120	36	51
ET2U8B22	8W 2U STICK B22	8	B22	450	10 000	2700	82	119	36	53
ET2U11E14	11W 2U STICK E14	11	E14	670	10 000	2700	82	139	36	55
ET2U11E27	11W 2U STICK E27	11	E27	670	10 000	2700	82	140	36	57
ET2U11B22	11W 2U STICK B22	11	B22	670	10 000	2700	82	139	36	59
ET2U15E27	15W 2U STICK E27	15	E27	810	10 000	2700	82	160	41	62
ET2U15B22	15W 2U STICK B22	15	B22	810	10 000	2700	82	159	41	64

3U STICKS

ET3U9E14	9W 3U STICK E14	9	E14	510	10 000	2700	82	109	38	54
ET3U9E27	9W 3U STICK E27	9	E27	510	10 000	2700	82	108	38	55
ET3U9B22	9W 3U STICK B22	9	B22	510	10 000	2700	82	110	38	57
ET3U11E27	11W 3U STICK E27	11	E27	700	10 000	2700	82	119	38	61
ET3U11B22	11W 3U STICK B22	11	B22	700	10 000	2700	82	118	38	62
ET3U13E27	13W 3U STICK E27	13	E27	810	10 000	2700	82	128	38	62
ET3U13B22	13W 3U STICK B22	13	B22	810	10 000	2700	82	128	38	65
ET3U15E27	15W 3U STICK E27	15	E27	900	10 000	2700	82	137	38	69
ET3U15B22	15W 3U STICK B22	15	B22	900	10 000	2700	82	136	38	70
ET3U20E27	20W 3U STICK E27	20	E27	1240	10 000	2700	82	152	46	90
ET3U20B22	20W 3U STICK B22	20	B22	1240	10 000	2700	82	151	46	92
ET3U23E27	23W 3U STICK E27	23	E27	1380	10 000	2700	82	162	46	108
ET3U23B22	23W 3U STICK B22	23	B22	1380	10 000	2700	82	161	46	110



Specifications: (at full bright light)

End of life protection	Yes
Ballast type	Electronic
Starting mode	Rapid start
Input line voltage	220-240V
Input line frequency	50-60Hz
Rated lamp life	10 000 hours
Colour temperature	2700K
Colour Rendering Index	>80
Min. Starting Temperature	- 20°C
Max. Operating Temperature	+ 45°C
CE Compliance	Yes
EMI Compliance	EN55015
Energy Grade	A
Lamp operating frequency	42 kHz
Lamp current crest factor	< 1.8
Total Harmonic Distortion	< 150 kHz
Power Factor	> 0.55
Mercury content	< 2.0 mg

Certifications:

